

Row	1			2			3		4			5				6	7	8	9	10
Meter with modbus output																				
MCB rating	16	16		16	10				10	10										
IOPS/SWS/LSF	✔	✔		✔	✔				✔	✔										
XL-LSF Singles																				
CPC mm² (A = Armour)	A	A	A	A	A	A			A	A	A									
No Circuit Cores	4	4	2	4	4	2			4	4	2									
Cable mm²	2.5	2.5	1.5	2.5	1.5	1.5			1.5	1.5	1.5									
Starter Type	VSD	VSD		VSD	VSD				VSD	VSD										
Start (Amps)	-	-		-	-				-	-										
FLC (Amps)	8.1	6.4		6.6	0.9				2.6	2.4										
Phases	3	3	1	3	3	1			3	3	1									
Motor kW	4.5	3	-	3.6	4	-			1.1	1.1	-									
Plant components	SF	EF	light	SF	EF	light	AHU	HTR	SF	EF	light	SF	EF	light	HTR					
Plant Item Label	AHU01			AHU02					AHU03							Spare way	Spare way	Spare way	Spare way	Spare way
Panel Selection Facilities	Hand/Off/ Auto/Reset			Hand/Off/ Auto/Reset			Hand/Off/ Auto/Reset		Hand/Off/ Auto/Reset			Hand/Off/ Auto/Reset				Hand/Off/ Auto/Reset	Hand/Off/ Auto/Reset	Hand/Off/ Auto/Reset	Hand/Off/ Auto/Reset	Hand/Off/ Auto/Reset
FACIA INFORMATION	MECHANICAL SERVICES CONTROL PANEL																			
Panel Indication	Run Trip			Run Trip			Run Trip		Run Trip			Run Trip								

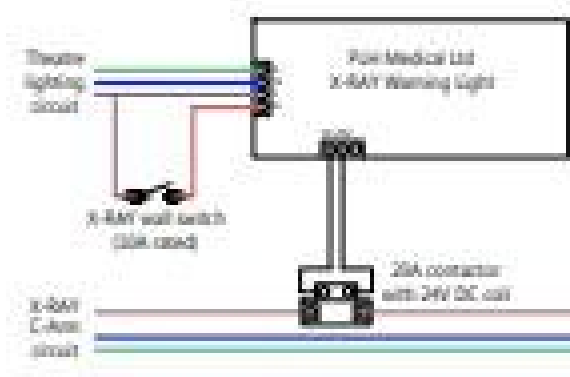

ULTRASOUND & X-RAY WIRING ARRANGEMENT

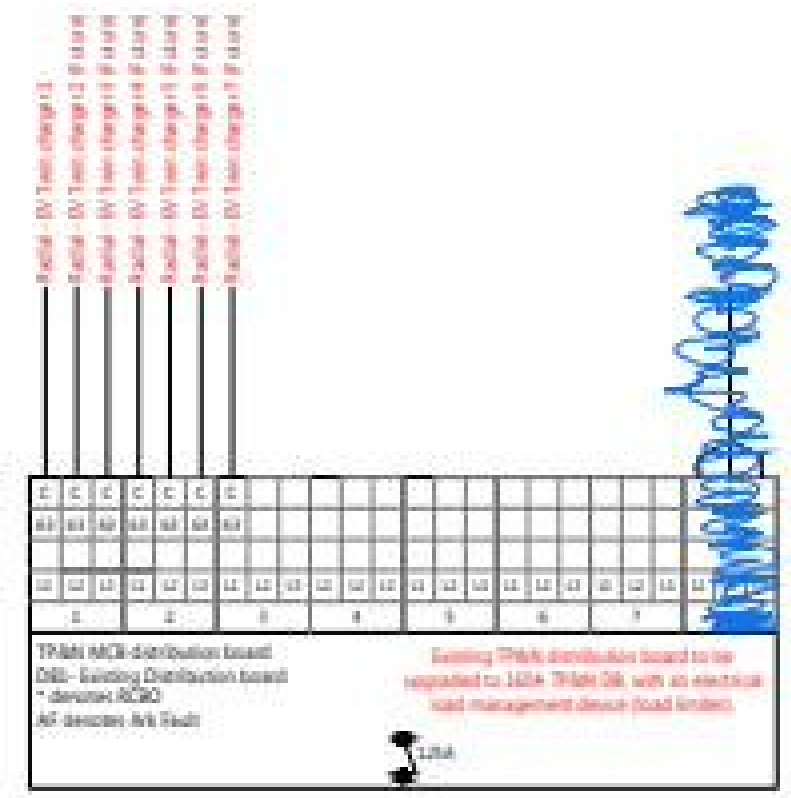

NOTES

1. Drawing to be read in conjunction with all other Sharman Grimwade Ltd drawings and specification. Confirmation shall be sought from the design team if any discrepancies are identified.
2. Circuits highlighted in red denote allowances for assumed specialist requirements or existing services, the electrical contractor shall make allowance for investigative works to determine the extent of existing services and specialist required services.

SAFETY HEALTH AND ENVIRONMENTAL INFORMATION


In addition to the hazards / risks normally associated with the types of work detailed on this drawing, note the following risks and information.


Risks listed here are not exhaustive. Refer to CDM Risk Assessment Schedule.

It is assumed that all works will be carried out by a competent contractor working, where appropriate, to an approved method statement.

LV SCHEMATIC LEGEND

- CPD protection curve
- CPD current rating
- * denotes 30mA RCBO
- 230V contactor
- Incoming meter kit

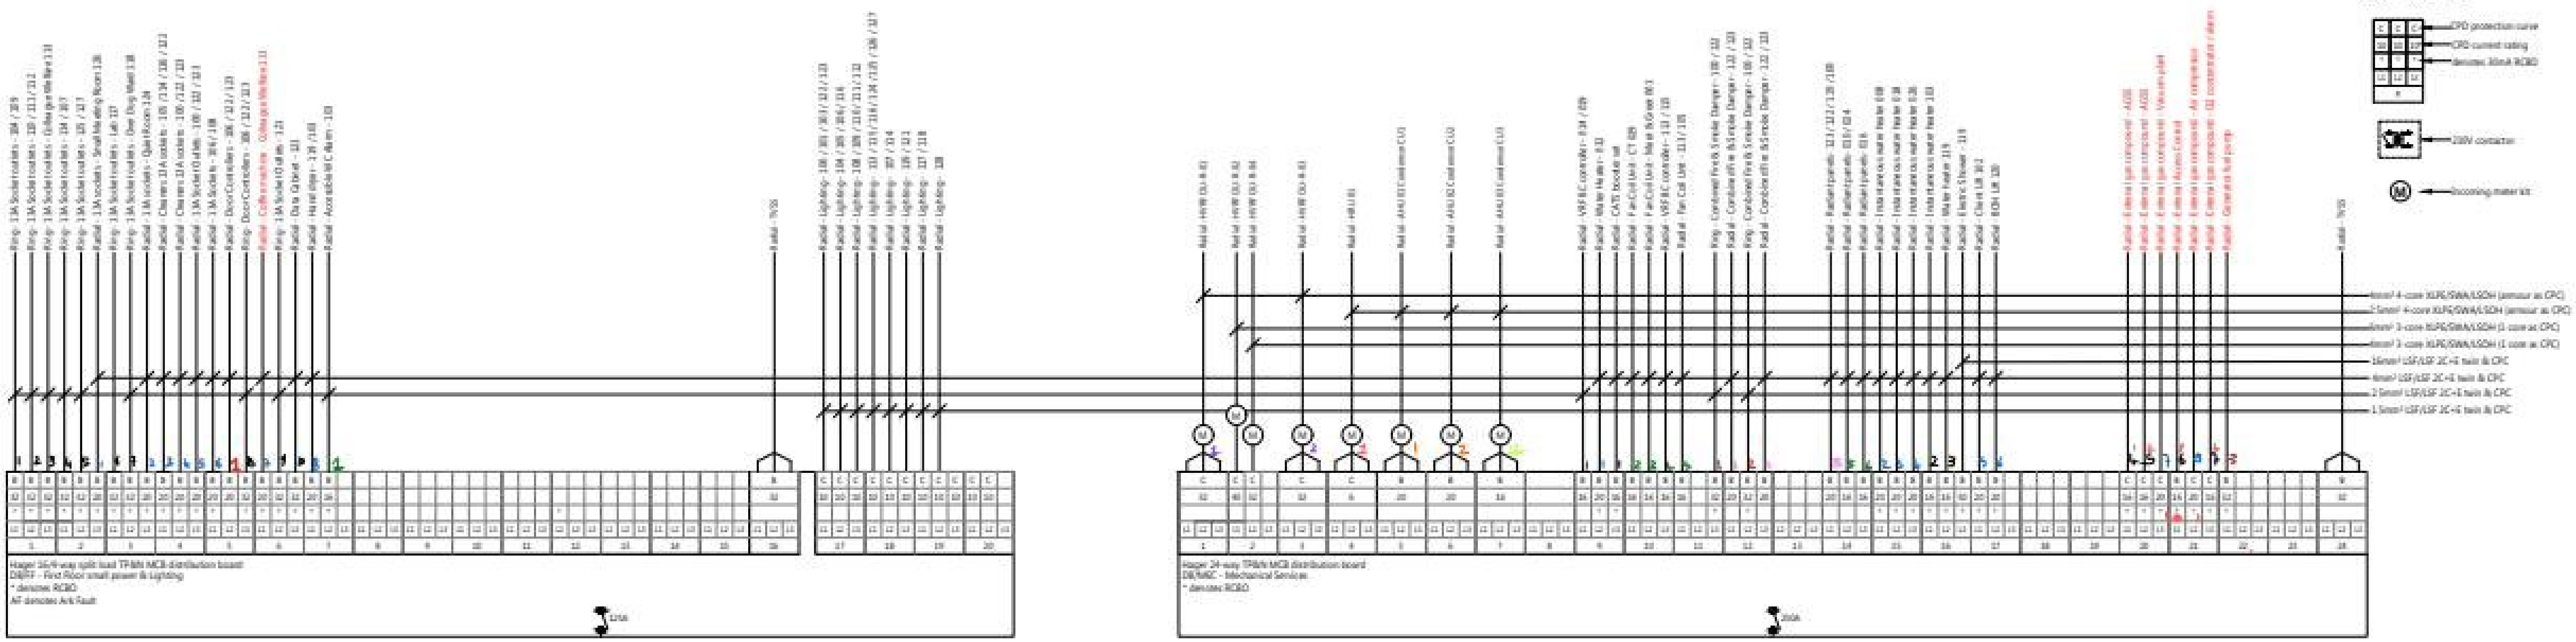

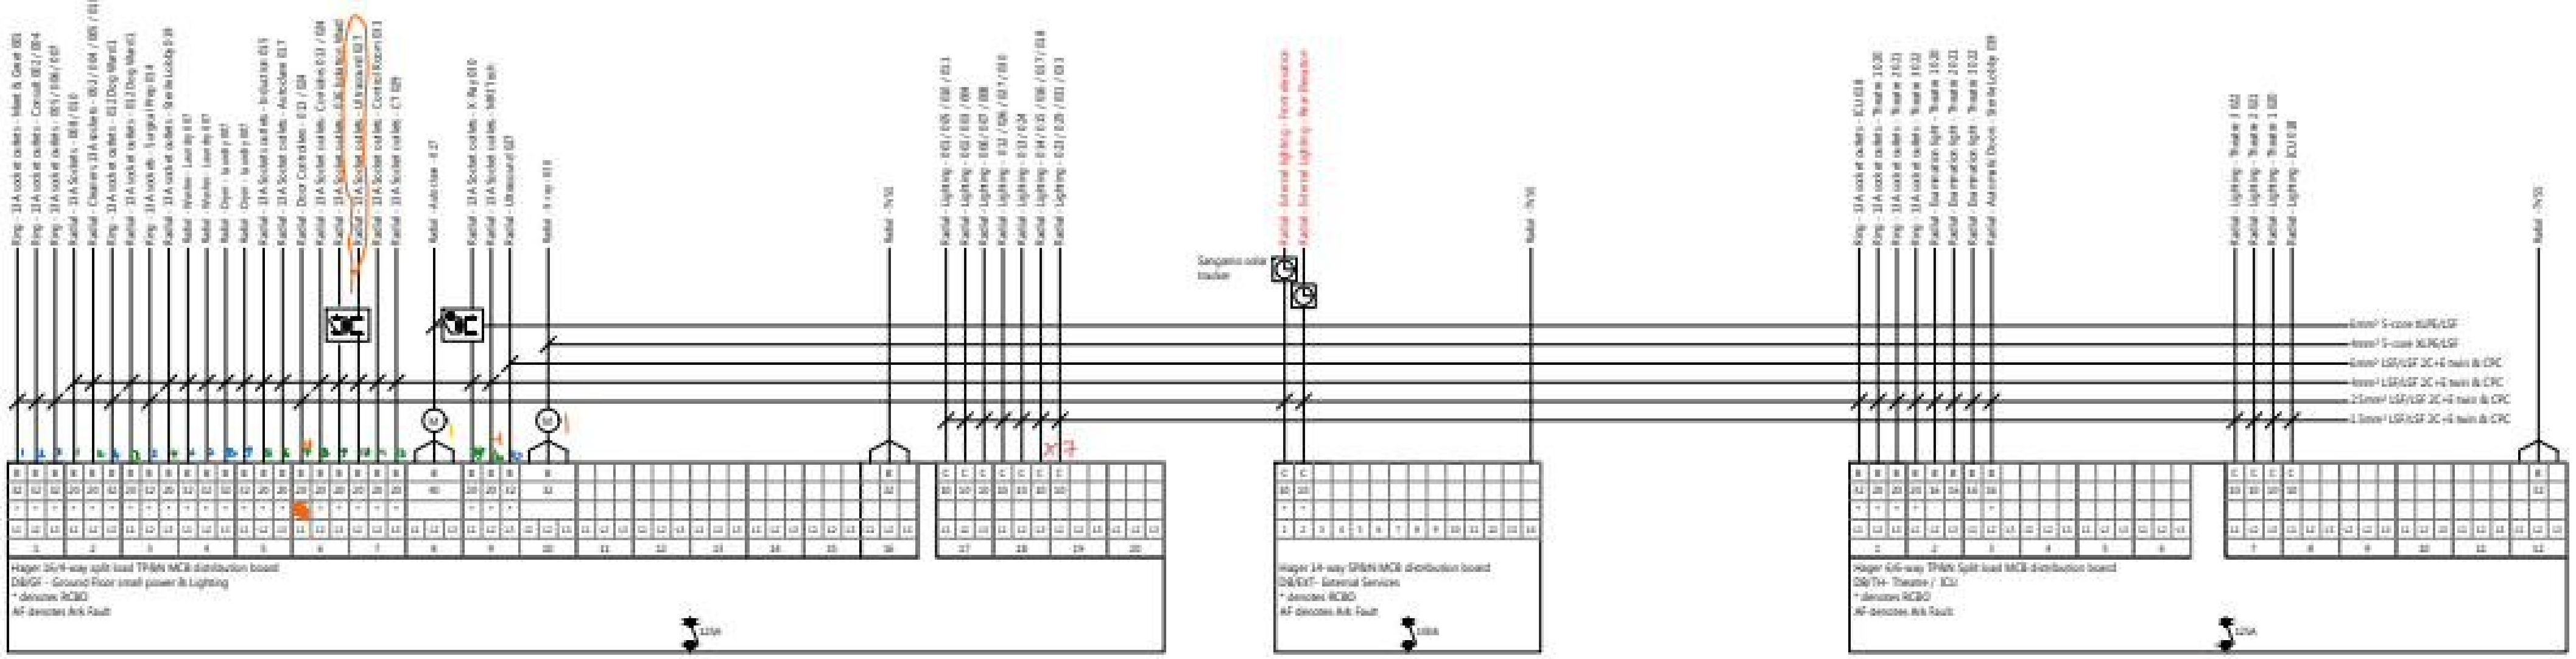

Rev	Date	Details	Drawn
P1	27.04.26	PRELIMINARY ISSUE	LH

SHARMAN GRIMWADE LTD.

5-7 The Avenue, Newmarket, CB8 9AA
01638 428260
sharman-grimwade.co.uk

Client: LINNAEUS GROUP	First Issue: 27.04.2026
Project: KENTDALE REFERRALS REVISED SCHEME	Scale: NTS A1
Title: PROPOSED LV SCHEMATIC - SHEET 2 OF 2	Drawn: LH
	Checked: TCG Approved: JNS
Document Type: SCHEMATIC	Revision: P1
Proposed Status: PRELIMINARY	Status: S0

2429 - SGL - V1 - XX - DR - E - 1002